

GRAU


Falling Leaf Deckenaufbau

Falling Leaf zentriert den Raum wie ein magisches Objekt. Ihre hochmoderne Linse ergießt ein schönes blendfreies Licht großzügig über den Tisch und passt sich durch Warm Dim Technologie der Atmosphäre an. Dimme die Lichtstimmung um mühelos mit dem Phasen-Drehdimmer oder via GRAU App.

Farben

| Farben | Artikelnummer |
|------------------|---------------|
| ● Black | FLU1-310-00 |
| ● Sand White | FLU1-310-05 |
| ● Polished/Black | DL00-0 |
| ● Polished/White | DL00-1 |

Dimensionen

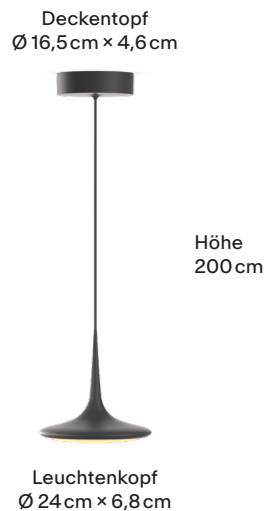


Body

| | |
|------------------------------|------------------------------------------------------------------------------------|
| Pendellänge | 2m |
| Material | Aluminium |
| Oberfläche | Black, Sand White: Pulverbeschichtet Polished/Black, Polished/White: Poliert |
| Gewicht | 2kg |
| Montageart | Deckenaufbau |
| Nennspannung | 220 – 240V |
| Leistungsaufnahme | 16W |
| Leuchteneffizienz | 88lm/W |
| Anschlussleitung (Ader-Zahl) | 3 |
| Schutzklasse | I |
| EU-Konformität | CE |

GRAU

Lichtkurve

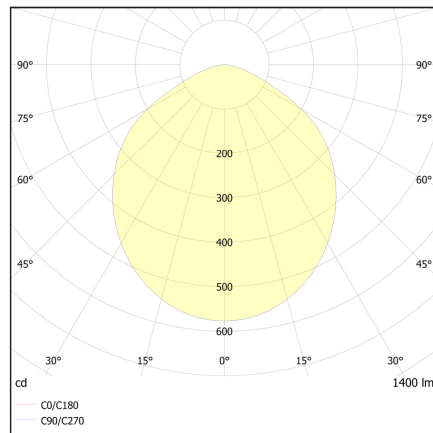

Licht

| | |
|---------------------------|-----------------|
| Leuchtmittel | LED |
| Leuchtenlichtstrom | 1400lm |
| Farbwiedergabeindex | CRI > 90 |
| Lichtaustritt | Direkt |
| Abstrahlwinkel | 104° |
| Lichtverteilung | Symmetrisch |
| Farbtemperatur | 2700 - 2200K |
| Lichtfarbe | Warmweiß |
| Dimmbar | Ja |
| Art der Dimmung | Phasenabschnitt |
| Warm Dim | Ja |
| GRAU App Upgrades möglich | Ja |
| Umbau auf DALI möglich | Ja |
| Energieeffizienz (direkt) | D |

GRAU

Falling Leaf

Ceiling-mounted
Surface

Falling Leaf centres a space like a magical object. With its state-of-the-art lens, this iconic lamp beams beautiful, adaptable, and de-glared light. Adjust color temperature and brightness with integrated WarmDim. Control via rotary phase dimmer or via the GRAU App.

Colors

| Color | SKU |
|------------------|-------------|
| ● Black | FLU1-310-00 |
| ● Sand White | FLU1-310-05 |
| ● Polished/Black | DL00-0 |
| ● Polished/White | DL00-1 |

Dimensions




Body

| | |
|------------------------------------|---------------------------------------------------------------------------------|
| Pendant length | 2 m |
| Material | Aluminum |
| Surface | Black, Sand White: Powder-coated Polished/Black, Polished/White: Polished |
| Weight | 2 kg |
| Mounting type | Ceiling-mounted (surface) |
| Rated voltage | 220 – 240 V |
| Power consumption | 16 W |
| Luminaire efficiency | 88 lm/W |
| Connection cable (number of cores) | 3 |
| Protection class | I |
| This Product is CE conform | CE |

GRAU

Light Curve

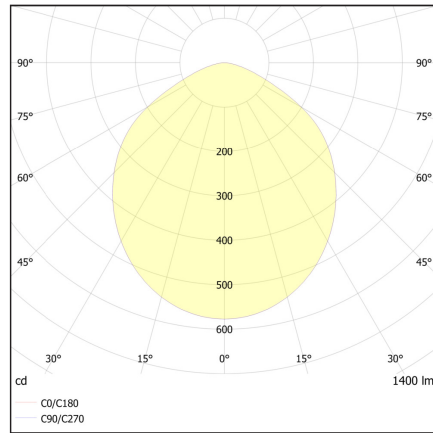

Light

| | |
|----------------------------------|---------------------|
| Light source | LED |
| Luminous flux | 1400lm |
| Color rendering index | CRI > 90 |
| Light emission | Direct |
| Beam angle | 104° |
| Light distribution | Symmetric |
| Color temperature | 2700 - 2200K |
| Light color | Warm White |
| Dimmable | Yes |
| Type of dimming | Phase rotary dimmer |
| Warm Dim | Yes |
| GRAU App upgrades possible | Yes |
| Conversion to DALI possible | Yes |
| Energy efficiency (direct light) | D |