

# GRAU

## John Wand

John begleitet dich flexibel durch den ganzen Tag. Ihre geniale Ergonomie in Kombination mit Color Tune in vier Stufen, sowie ihre Warm Dim Funktion von 2700 - 2200K, sorgen für Wohlbefinden und Fokus. John ist die agile Leuchte zum Lesen und Arbeiten, die für Energieeffizienz und Beweglichkeit steht.

## Farben

Farben	Artikelnummer
● Black	TC54-2
● Sand White	TC54-12
○ White	TC54-0
● Graphite	TC54-10
● Light Blue	TC54-8

## Dimensionen




## Body

Maße Verpackung (L x B x H)	112cm x 26cm x 20cm
Material	Aluminium
Oberfläche	Pulverbeschichtet
Gewicht	0,9kg
Leuchtenkopf beweglich	Ja
Montageart	Wandaufbau
Nennspannung	120 - 240V
Leistungsaufnahme	11W
Leuchteneffizienz	64lm/W - 91lm/W
Länge Anschlussleitung	2m
Steckernetzteil	Ja - mit USB-C Anschluss
Schutzklasse	II
EU-Konformität	CE

# GRAU

## Lichtkurve

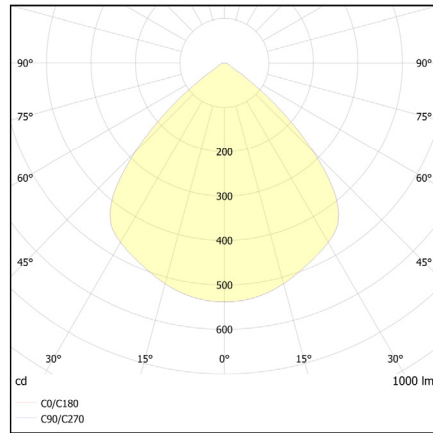

## Licht

Leuchtmittel	LED
Leuchtenlichtstrom (Color Tune)	700 lm / 850 lm / 950 lm / 1000 lm
Leuchtenlichtstrom (Warm Dim)	850 lm
Farbtemperatur (Color Tune)	2400 K / 2700 K / 3000 K / 3500 K
Farbtemperatur (Warm Dim)	2700 – 2200 K
Farbwiedergabeindex	CRI > 90
Lichtaustritt	Direkt
Abstrahlwinkel	91°
Lichtverteilung	Symmetrisch
Lichtfarbe	Warmweiß – Neutralweiß
Dimmbar	Ja
Art der Dimmung	Integrierter Taster
Energieeffizienz (direkt)	E

# GRAU

## John Wall

John is your flexible companion throughout the day. With superb ergonomics and four levels of Color Tune technology as well as its Warm Dim function from 2700 - 2200K, it's the ultimate lamp for focus and wellbeing. John is the agile light for reading and working that stands for energy efficiency and mobility.

## Colors

Color	SKU
● Black	TC54-2
● Sand White	TC54-12
○ White	TC54-0
● Graphite	TC54-10
● Light Blue	TC54-8

## Dimensions




## Body

Packaging dimensions (L x W x H)	112cm x 26cm x 20cm
Material	Aluminum
Surface	Powder-coated
Weight	0,9 kg
Movable lamp head	Yes
Mounting type	Wall-mounted (surface)
Rated voltage	120 - 240 V
Power consumption	11 W
Luminaire efficiency	64 lm/W - 91 lm/W
Length of connection cable	2 m
Plug-in power supply unit	Yes - with USB-C connection
Protection class	II
This Product is CE conform	CE

# GRAU

## Light Curve

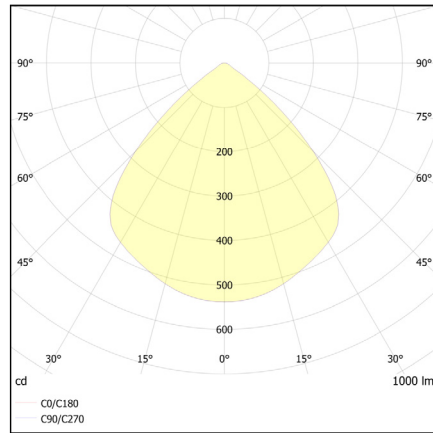

## Light

Light source	LED
Luminous flux (Color Tune)	700 lm / 850 lm / 950 lm / 1000 lm
Luminous flux (Warm Dim)	850 lm
Color temperature (Color Tune)	2400 K / 2700 K / 3000 K / 3500 K
Color temperature (Warm Dim)	2700 – 2200 K
Color rendering index	CRI > 90
Light emission	Direct
Beam angle	91°
Light distribution	Symmetric
Light color	Warm White - Neutral white
Dimmable	Yes
Type of dimming	Integrated pushbutton
Energy efficiency (direct)	E